


Diamond PCD Compression Router Bits

3 Wing

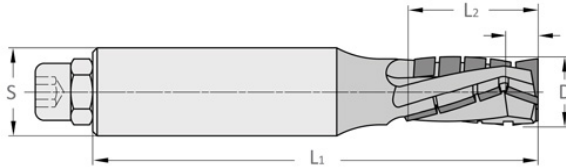

Applications

- Grooving, jointing, rebating, sizing of raw or coated chipboard and MDF material

Advantages

- Less waste of material
- Low cutting force
- Good edge quality on top and bottom

Technical Information

- RPM: 18,000-35,000
- Feed rate: 590-1375 in/min (depending on material type and thickness)

Part No.	D	L2	L1	S	Material Thickness
RN300	12	22	75	12x45	.394"-.750"
RN301	12.7 (.500)	28	85	12x45	.512"-.866"
RN302	12.7 (.500)	28	85	12.7 (.500)x45	.512"-.866"
RN303	16	21	95	20x55	.512"-.748"
RN304	16	29	100	20x55	.748"-.984"
RN305	18	52	130	20x55	1.102"-.1.89"